



TECHNICAL DATA / **DONNÉES TECHNIQUES** / **DATI TECNICI**

Fluid / Fluide / <i>Fluido</i>	Water / Eau / <i>Acqua</i>
Maximum pressure / Pression Max / <i>Pressione</i>	15 bar
Temperature / Température / <i>Temperatura</i>	-10° C / +50° C
Regulation range / Grade de regulation / <i>Campo di regolazione</i>	0-2bar 0-4bar 0-8bar standard 0-12bar
Manometer fastening / Raccordement manomètre / <i>Attacco manometro</i>	1/8

ORDERING CODE / **CODIFICATION** / **CHIAVE DI CODIFICA**

X Q 0 0 0 0


REGULATION RANGE / **GRADE DE RÉGULATION** / *CAMPO DI REGOLAZIONE*

- 1=0-2bar
- 2=0-4bar
- 3=0-8bar STANDARD
- 4=0-12bar


THREAD / **FILETAGE** / *FILETTO*

- 1= G 1/8
- 2= G 1/4

DIMENSIONS / **DIMENSIONS** / *DIMENSIONI*

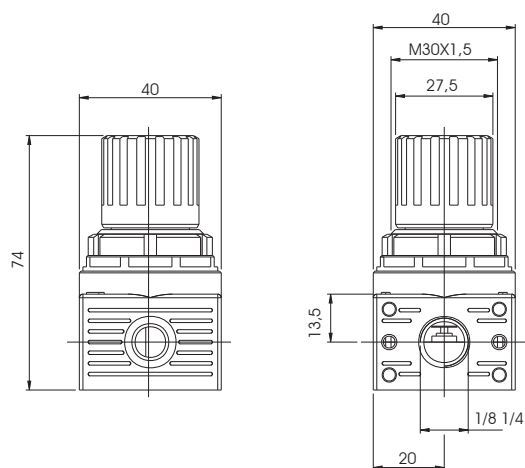

COMPONENTS / **COMPOSANTS** / *COMPONENTI*

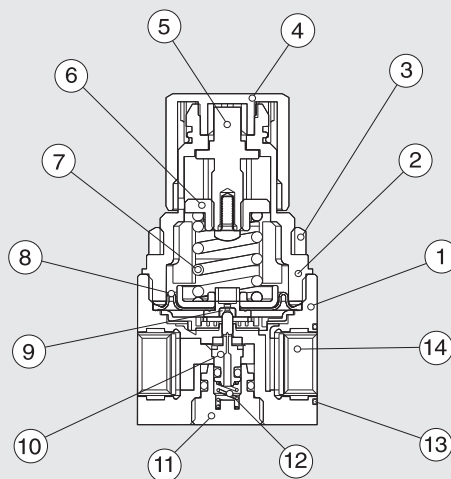

1	Body / Corps / <i>Corpo</i>	polymer / polymère / <i>polimero</i>
2	bell / cloche / <i>campana</i>	polymer / polymère / <i>polimero</i>
3	fixing nut / ecrou fixation / <i>ghiera di fissaggio</i>	polymer / polymère / <i>polimero</i>
4	knob / molette / <i>manopola</i>	polymer / polymère / <i>polimero</i>
5	register screw / vis de réglage / <i>vite di registro</i>	brass / laiton / <i>ottone</i>
6	female screw / ecrou femelle / <i>chiocciola</i>	brass / laiton / <i>ottone</i>
7	spring / ressort / <i>molla</i>	steel / acier / <i>acciaio</i>
8	membrane / membrane / <i>membrana</i>	
9	seal / Joint / <i>guarnizione</i>	NBR
10	shutter / obturateur / <i>otturatore</i>	NBR
11	plug / bouchon / <i>tappo</i>	polymer / polymère / <i>polimero</i>
12	spring / ressort / <i>molla</i>	stainless steel / acier inox / <i>acciaio inox</i>
13	o-ring / joint torique	NBR
14	threaded insert / filetage / <i>inserto filettato</i>	brass / laiton / <i>ottone</i>